





RESIDENTIAL SECTIONAL GARAGE DOOR OPENER

BATTERY BACKUP CAPABLE

KEY FEATURES

EXTRUDED RAIL FOR HEAVY DOORS

Supplied with aluminium extruded rail, ideal for heavy custom doors.

MYQ INCLUDED

This model includes the myQ Connectivity Bundle to provide optimal entrapment protection for heavy doors as well as full myQ functionality.

POWERFUL LED LIGHTING

Illuminate your garage corner-to-corner.



Compliant to Australian and New Zealand Standard AS/NZS 60335.2.95

SMART



MYQ CAPABLE TECHNOLOGY lets users create schedules, monitor, receive alerts and control the garage door opener away from home.



SOFT-START AND SOFT-STOP for smooth operation.

QUIET & RELIABLE



7-YEAR WARRANTY



QUIET DC MOTOR eliminates noise and vibrations through the ceiling and provide smooth operation.



HEAVY-LIFTING POWER operates doors up to 350 kg. (2)



BATTERY BACKUP ensures access even when the power is out.1

SAFE & SECURE



SECURITY+ 2.0° sends a new code with every remote click.



PREMIUM AUTOMATIC SAFETY REVERSE function will allow your garage door to stop and reverse automatically if obstructed going down or stop going up.



TIMER-TO-CLOSE automatically closes the door after a pre-set amount of time.³



IMPROVED TRANSMITTER RANGE has up to 18% better range meaning you can start opening your garage door sooner.4



AUTOMATIC FORCE SENSING monitors and adjusts the force needed to open your garage with each operation



 $\textbf{MANUAL RELEASE CORD} \ \text{allows you to open your garage door whenever needed}.$



SERVICE your Garage Door Opener and Garage Door by a professional annually.



STRONG AND INNOVATIVE RAIL

EXTRUDED ALUMINIUM RAIL IN 2 LENGTHS⁵

This extremely rigid and innovative rail features simple and convenient installation, chain capture and IR Beam wire concealment. Available in lengths to suit doors up 2.5m or



M828AU774

E970M

E148M

M-BBU24V

E964M



MYO CONNECTIVITY BUNDLE

Monitor and control away from home. Includes myQ Gateway and The Protector System[™] (Safety IR Beams).



FOUR BUTTON REMOTE CONTROLS

Premium remotes to control up to 4 garage doors or gates. Each button can be programmed to Security+ and Security+ 2.0 devices.



FOUR BUTTON WIRELESS WALL MOUNT REMOTE CONTROL

4 button wall remote to control garage doors, gates and myQ Remote LED Light. Easily programmed to Security+ and Security+ 2.0 devices.

POWERFUL ADD-ONS



BATTERY BACKUP

Get in and out when the power's out with Battery Backup.



WIRELESS SECURITY KEYPAD

Convenient and safe access to your garage without using a remote control



FOUR BUTTON CAR VISOR REMOTE CONTROL

Easily attaches to your car visor to control up to 4 garage doors or gates. Can be programmed to Security+ and Security+ 2.0 devices.

gomerlin.com.au ■ gomerlin.co.nz

¹Additional purchase of Merlin Battery Backup accessory required to enable Battery Backup functionality. Visit gomerlin.com.au or gomerlin.com.z for further information. ²350kg door rating is based on having installation of Safety IR Beams, slow speed in open and close & installation of the extruded aluminium rails. ²Safety IR Beams must be installed to enable the use of Timer-to-Close. See User Guide for additional information. Smartphone not included. ²When compared to other available Merlin products. ⁸Combo includes passpoint assembly conversion kit to suit extruded rail.

Commander Extreme 1 HEAVY DOOR COMBO

DESIGNED FOR HEAVY CUSTOM SECTIONAL DOORS

MS125MYQXPS25 / MS125MYQXPS30









RESIDENTIAL SECTIONAL GARAGE DOOR OPENER

BATTERY BACKUP CAPABLE

Includes my Q. smart technology

APP AVAILABLE ON



- Set real time notifications to alert you when your garage opens, closes or is left open.
- Monitor and control your garage door from anywhere
- Share limited guest access with five people you trust.
- Pre-set scheduling to close your garage door at a certain time.



- · Protect your loved ones and belongings with The Protector System[™] (Safety IR Beams).
- · Peace of mind knowing if your garage door is open or closed anywhere and any time


MS125MYQXPS25

For doors up to 2.5m high

MS125MYQXPS30

For doors up to 3.0m high

TYPICAL INSTALLATION - SECTIONAL DOORS

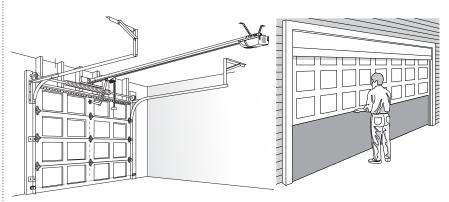

- · Maximum lifting under spring tensions 20 kg
- · Suitable for steel and timber spring balanced doors
- Total door area: 20m²
- Single dwelling, max door weight up to 350 kg⁽²⁾





- · Encrypted rolling code across multiple frequencies.
- Security+ 2.0® technology virtually eliminates interference.





- Provides 2-way communication from rolling door opener and accessories.
- · Receiver with 64 memory registers.



LIGHTING: LED LIGHTING

- LED light turns on with activation.
- Turns off 2.5 minutes after operation.

STANDARD SPECIFICATIONS

- Input voltage: 220-240 VAC
- Rated door areas up to: 20m²
- Max door height: 3.0m
- Max door weight: 350 kg⁽²⁾
- Max peak pulling force: 1200N
- Max lift under spring tension: 20 kg
- Radio frequency: 433.30, 433.92, 434.54 MHz with Security+ 2.0 technology
- Minimum headroom required: 30mm
- · Extruded (X) Rail with chain drive
- 24C DV motor with thermal overload protection
- · Lighting: LED Lighting
- Garage Door Opener Capacity of up to 64 memory registers
- · Supplied with myQ technology





AUSTRALIA

Chamberlain Australia Pty Ltd PO Box 1446 Lane Cove NSW 1595 Australia

gomerlin.com.au 1800 638 234

NEW ZEALAND

Chamberlain New Zealand Ltd PO Box 100-221 North Shore, Auckland 0745 New Zealand

gomerlin.co.nz 0800 653 667

Designed & Engineered in Australia. © 2023 The Chamberlain Group LLC. All Rights Reserved. $^{\circ}$ Registered Trade Marks of The Chamberlain Group, Inc. $^{\intercal}$ Trade Marks of Chamberlain Group, Inc.



Your Merlin Dealer, call: 02 4353 0853



WARNING! Product contains coin/button cell batteries. The battery is hazardous. Keep product and batteries away from children. Battery can cause severe or fatal injuries in 2 hours or less if swallowed or placed inside any part of the body. Seek immediate medical attention if it is suspected that a coin/button cell battery has been swallowed or placed inside any part of the body.

¹Based upon a 2.4m high door. ²350kg door rating is based on having installation of Safety IR Beams, slow speed in open and close & installation of the extruded aluminium rails. Apple, the Apple logo, iPhone, and iPad are trademarks of Apple Inc., registered in the U.S. and other countries and regions. App Store is a service mark of Apple Inc., Google Play and the Google Play logo are trademarks of Google LLC.